

SKU : 131746

This series of hydraulic workshop presses with motor drive is produced in Europe. The stable portal design with adjustable, open support table is suitable for applications such as pressing in and out bearings, for assembly and straightening work or for testing workpieces. The laterally positionable working cylinder facilitates set-up without the workpiece having to be moved. These presses are almost indispensable in technical workshops and maintenance departments.

- High quality – made in Europe
- Hydraulic motor drive
- Horizontally adjustable cylinder unit
- Adjustable table height



TECHNICAL SPECS

WORKING AREA

Pressure force	160 t
Operating pressure (max.)	255 bar
Stroke	400 mm
Forward motion speed	7.48 mm/s
Press speed	2.4 mm/s
Return speed	9.35 mm/s

DRIVE CAPACITY

Motor rating hydraulic pump	3 kW
-----------------------------	------

MEASURES AND WEIGHTS


Hydraulic tank volume	57 l
Weight	1195 kg

DIMENSIONS


A	2200 mm
B	1410 mm
C	825 mm
D	1100 mm
E	380 mm
F	1725 mm
G	150 mm
H	180 mm
I	750 mm
J	935 mm
K	325 mm

PRODUCT DETAILS

- Ideal for repair and assembly work
- Truing of axles, supports, shafts and much more
- For removal and pressfitting bearings and bushings
- 2-step hydraulic unit
- Supply voltage 3x400 V / 50 Hz
- Work cylinder with smooth horizontal adjustment
- Press frame features high rigidity, functionality and excellent finish

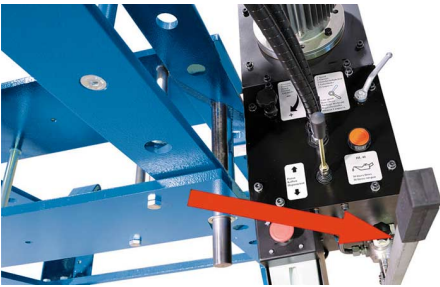

A hand pump is available for very delicate work

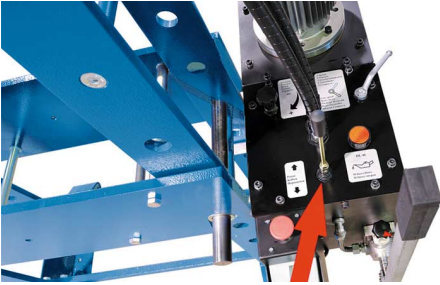

The press is operated via joystick

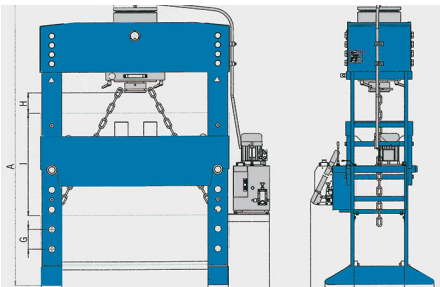


Table height can be adjusted easily via hydraulic lifting gear



The hydraulic cylinder can be moved laterally and is clamped mechanically