



## SKU : 131770

This series of hydraulic workshop presses with motor drive are designed with a stable portal with adjustable, open support table and are suitable for applications such as pressing in and out bearings, for assembly and straightening work or for testing workpieces. The laterally positionable working cylinder facilitates set-up without the workpiece having to be moved. These presses are almost indispensable in technical workshops and maintenance departments.

- Motorized hydraulic drive
- Horizontal piston travel
- Adjustable table height
- Set of prismatic blocks



## TECHNICAL SPECS

### WORKING AREA

Working width	830 mm
Frame through-hole	300 mm
Pressure force	60 t
Operating pressure (max.)	400 bar
Stroke	400 mm
Forward motion speed	6.1 mm/s
Press speed	6.1 mm/s
Return speed	10 mm/s

### DIMENSIONS


A	2400 mm
B	850 mm
C	1050 mm
D	830 mm
E	300 mm
F	1460 mm

### DRIVE CAPACITY



Motor rating hydraulic pump	3 kW
-----------------------------	------

### MEASURES AND WEIGHTS

Hydraulic tank volume	6 l
Weight	700 kg
Dimensions (L X W X H)	1460 mm x 850 mm x 2400 mm

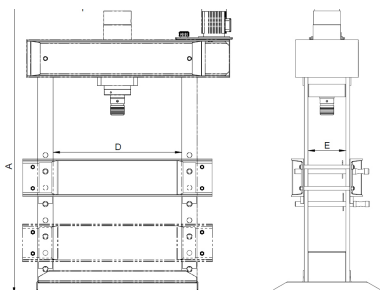

Measurements

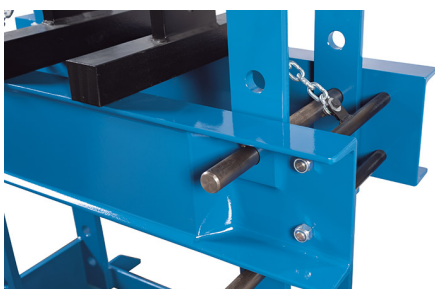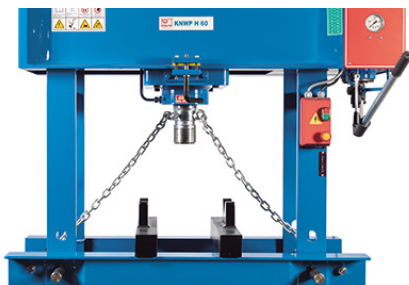

## PRODUCT DETAILS

- Torsionally rigid welded gantry-style frame made of thick-walled sectional steel
- Heavy-duty design, intended for professional use
- Versatile for many kinds of repair and assembly work
- Finely adjustable press force for trueing axles, supports, shafts, and much more
- Long piston stroke for removing and press-fitting bearings and bushings
- The operator can see the current working pressure on the gauge at all times.
- Motorized hydraulic unit for efficient work
- Work cylinder with smooth horizontal adjustment for easier setup
- Premium components for guaranteed long-lasting reliable operation

## STANDARD EQUIPMENT

Movable working cylinder  
 Height adjustable work table  
 V-blocks  
 Manometer  
 Operator manual